



## AE Series Strain Indicator Calibrator



### Features:

- True Wheatstone bridge circuitry
- Independent model AE-120 for 120 Ω , and model AE-350 for 350 Ω
- Simulates quarter, half, and full-bridge
- 12 position preset range
- Quarter-bridge strain range direct reading: -100 to +100 000 με .
- Half and Full-bridge strain range direct reading: ± 100 to ± 100 000 με .
- Transducer range: ± 0.5 mV/V to ± 50 mV/V
- Reversing switch for plus and minus calibration
- High precision resistors used throughout to ensure excellent stability
- Accuracy 0.3 percent

### Applications:


- Strain Indicator Calibrator
- Stress Indicator Calibrator
- Material elasticity Indicator Calibrator
- Load Cell Indicator Calibrator
- Micro-Resistance Indicator Calibrator
- Load Cell Signal Conditioning Calibrator
- Foil Strain Gage Signal Conditioning Calibrator
- Semiconductor Strain Gage Signal Conditioning Calibrator

### Description:

The Model AE calibrator is a Wheatstone bridge and generates a true change of resistance in one arms of the bridge.

It simulates the actual behavior of a strain gage in negative strain calibrator based on the Wheatstone bridge principle requires stable components.

Multiple ultra-stable and hi-stable precision resistors are used in the Model AE calibrator to provide the stability, repeatability and accuracy required in a laboratory strain gages instrument.

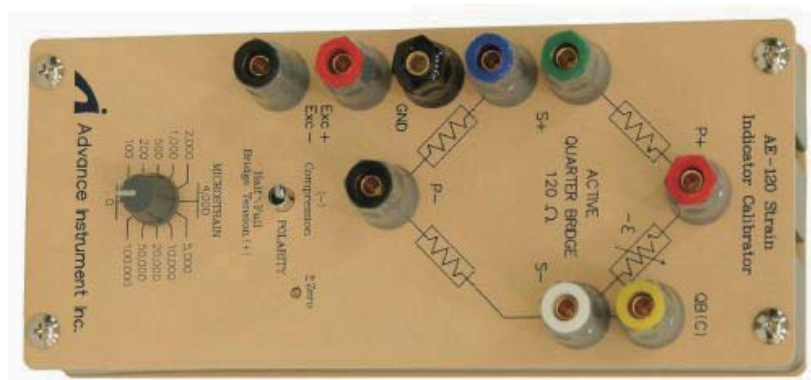



## AE Series Strain Indicator Calibrator

### Specification:

- Accuracy
  - 0.3% of setting  $\pm 3 \mu\epsilon$  ( 0.0015 mV/V ), maximum
- Repeatability
  - $\pm 3 \mu\epsilon$  ( 0.0015 mV/V ), maximum
- Stability
  - ( 0.3% of setting  $\pm 3 \mu\epsilon$  ) / ° C, maximum
- Thermal EMF
  - 1.0  $\mu$  V/V of excitation, maximum
- Bridge Resistances
  - Model AE-120 for 120  $\Omega$
  - Model AE-350 for 350  $\Omega$
- Output Resistance
  - $\pm 0.05\%$ , maximum, from nominal at "0"  $\mu\epsilon$
  - -20.0% at -100000  $\mu\epsilon$  ( Quarter Bridge )
- Circuit
  - True -  $\Delta R$  in one adjacent arms , plus three fixed arms for bridge completion
- Simulation
  - Quarter bridge, one active arm
  - Half bridge, one active arm
  - Full bridge, one active arm
- Range
  - One Active Arms 0 to -100000  $\mu\epsilon$
  - Quarter bridge:
    - 0, -100, -200, -500, -1000, -2000, -4,000, -5,000,
    - 10,000, -20,000, -50,000, -100,000  $\mu\epsilon$
    - @ G. F. = 2.000
  - Half and Full bridge:
    - 0,  $\pm 100$ ,  $\pm 200$ ,  $\pm 500$ ,  $\pm 1000$ ,  $\pm 2000$ ,  $\pm 4,000$ ,
    - $\pm 5,000$ ,  $\pm 10,000$ ,  $\pm 20,000$ ,  $\pm 50,000$ ,  $\pm 100,000 \mu$
    - $\epsilon$
    - @ G. F. = 2.000
  - Half and Full bridge: transducer
    - 0 to  $\pm 50$  mV/V
- Excitation
  - To Meet Accuracy and Repeatability Specifications
    - 120  $\Omega$  : up to 7 VDC
    - 350  $\Omega$  : up to 10 VDC
  - Maximum Permissible
    - 120  $\Omega$  : 10V AC or DC
    - 350  $\Omega$  : 17V AC or DC
- Output @ 0
  - 50  $\mu\epsilon$  ( 0.025 mV/V ), maximum in full-bridge mode
- Environment
  - Temperature
    - +50° F to +100° F ( +10° C to +38° C )
  - Humidity
    - Up to 70% RH, non-condensing
- Dimension
  - Aluminum case ( separable lid )
  - 202  $\times$  87  $\times$  60 mm ( 8 L x 3.5 W x 2.4 H in)
- Weight
  - < 1.3 kg ( < 2.9 LB )
  - All specifications are nominal or typical at +23° C unless noted.
- Model Options
  - AE-120 for 120  $\Omega$
  - AE-350 for 350  $\Omega$